



**FortiGate® 200D Series**  
 Distributed Enterprise Firewall  
 Next Generation Firewall



## FortiGate 200D Series

FortiGate 200D, 200D-POE, 240D, 240D-POE and 280D-POE

### The Fortinet Enterprise Firewall Solution

The Fortinet Enterprise Firewall Solution delivers end-to-end network security with one platform, one network security operating system and unified policy management with a single pane of glass—for the industry’s best protection against the most advanced security threats and targeted attacks.

### One Enterprise Firewall Solution across the Extended Enterprise

The FortiGate family of network appliances represents the industry’s broadest range of enterprise firewall platforms. FortiGate is based on FortiASIC, a purpose-built integrated architecture that provides extremely high throughput and exceptionally low latency, while delivering industry-leading security effectiveness and consolidation which is routinely validated by independent real-world tests. Targeted for mid-enterprises, the FortiGate 200D series contains superior security inspection functionality, deep visibility and high performance.

### Highlights

	Firewall	IPS	NGFW	Threat Protection	Interfaces
	Enterprise Traffic Mix				
FG-200D / 200D-POE	3 Gbps	350 Mbps	330 Mbps	310 Mbps	Multiple GE SFP DMZ and GE RJ45
240D / 240D-POE / 280D-POE	4 Gbps	350 Mbps	330 Mbps	310 Mbps	Multiple GE SFP DMZ and GE RJ45

Validated Security

One Network OS

Performance

Single Pane of Glass

Universal Platform Support




FortiGate appliances, interconnected with the Fortinet Security Fabric, form the backbone of the Fortinet Enterprise Solution

[forti.net/sf](http://forti.net/sf)



# HARDWARE


## FortiGate 200D(-POE)

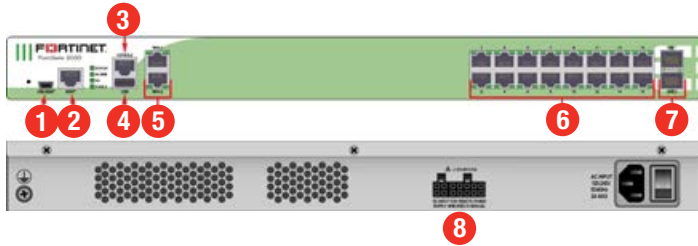

### Interfaces

1. USB Management Port
2. Management Port
3. Console Port
4. USB Port
5. 2x GE RJ45 WAN Interfaces
6. 16x GE RJ45 LAN Interfaces / 8x GE RJ45 LAN and 8x GE RJ45 PoE Interfaces on POE Model
7. 2x GE SFP DMZ Interfaces
8. FRPS Connector (not available on FG-200D-POE)


## FortiGate 240D(-POE)

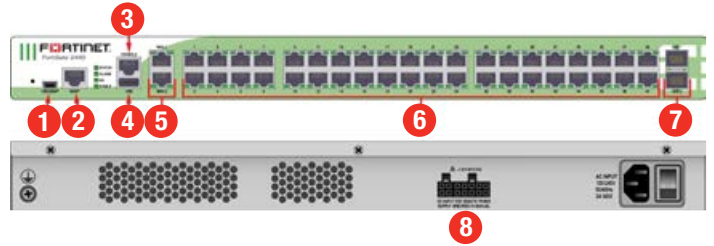

### Interfaces

1. USB Management Port
2. Management Port
3. Console Port
4. USB Port
5. 2x GE RJ45 WAN Interfaces
6. 40x GE RJ45 LAN Interfaces / 16x GE RJ45 LAN and 24x GE RJ45 PoE Interfaces on POE Model
7. 2x GE SFP DMZ Interfaces
8. FRPS Connector (not available on FG-240D-POE)

## FortiGate 280D-POE

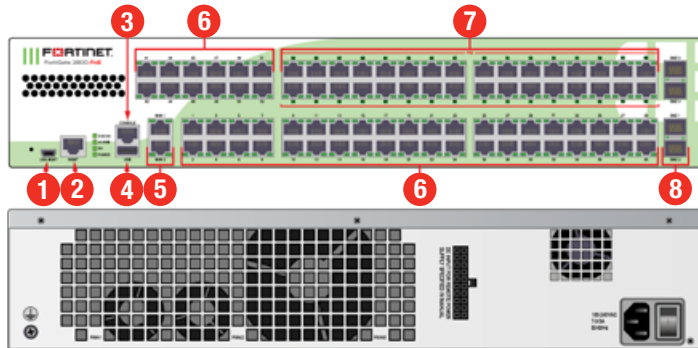

### Interfaces

- |                        |                                   |
|------------------------|-----------------------------------|
| 1. USB Management Port | 5. 2x GE RJ45 WAN Interfaces      |
| 2. Management Port     | 6. 52x GE RJ45 LAN Interfaces     |
| 3. Console Port        | 7. 32x GE RJ45 PoE LAN Interfaces |
| 4. USB Port            | 8. 4x GE SFP DMZ Interfaces       |



### Powered by FortiASICs

- Custom FortiASIC processors provide the performance needed to block emerging threats, meet rigorous third-party certifications, and ensure that your network security solution does not become a network bottleneck

### Content Processor

The FortiASIC CP8 content processor works outside of the direct flow of traffic, providing high-speed cryptography and content inspection services including:

- Signature-based content inspection acceleration
- Encryption and decryption offloading

### Network Processor

The FortiASIC NP4Lite network processor works inline with firewall and VPN functions delivering:

- Wire-speed firewall performance for any size packets
- VPN acceleration
- Anomaly-based intrusion prevention, checksum offload and packet defragmentation
- Traffic shaping and priority queuing



## SPECIFICATIONS

	FORTIGATE 200D	FORTIGATE 200D-POE	FORTIGATE 240D	FORTIGATE 240D-POE	FORTIGATE 280D-POE
<b>Hardware Specifications</b>					
GE RJ45 WAN Interfaces	2	2	2	2	2
GE RJ45 LAN Interfaces	16	8	40	16	52
GE RJ45 PoE LAN Interfaces	–	8	–	24	32
GE SFP DMZ Interfaces	2	2	2	2	4
USB (Client / Server)	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1
Console (RJ45)	1	1	1	1	1
Local Storage	64 GB	64 GB	64 GB	64 GB	64 GB
Included Transceivers	0	0	0	0	0
<b>System Performance</b>					
Firewall Throughput (1518 / 512 / 64 byte UDP packets)	3 / 3 / 3 Gbps	3 / 3 / 3 Gbps	4 / 4 / 4 Gbps	4 / 4 / 4 Gbps	4 / 4 / 4 Gbps
Firewall Latency (64 byte UDP packets)	2 µs	2 µs	6 µs	6 µs	2 µs
Firewall Throughput (Packets Per Second)	4.5 Mpps	4.5 Mpps	6 Mpps	6 Mpps	6 Mpps
Concurrent Sessions (TCP)	2 Million	2 Million	2 Million	2 Million	2 Million
New Sessions/Second (TCP)	77,000	77,000	77,000	77,000	77,000
Firewall Policies	10,000	10,000	10,000	10,000	10,000
IPsec VPN Throughput (512 byte packets)	1.3 Gbps	1.3 Gbps	1.3 Gbps	1.3 Gbps	1.3 Gbps
Gateway-to-Gateway IPsec VPN Tunnels	2,000	2,000	2,000	2,000	2,000
Client-to-Gateway IPsec VPN Tunnels	5,000	5,000	5,000	5,000	5,000
SSL-VPN Throughput	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps
Concurrent SSL-VPN Users (Recommended Maximum)	300	300	300	300	300
IPS Throughput (HTTP / Enterprise Mix) <sup>1</sup>	1.7 Gbps / 350 Mbps	1.7 Gbps / 350 Mbps	2.1 Gbps / 350 Mbps	2.1 Gbps / 350 Mbps	2.1 Gbps / 350 Mbps
SSL Inspection Throughput <sup>2</sup>	340 Mbps	340 Mbps	340 Mbps	340 Mbps	340 Mbps
Application Control Throughput <sup>3</sup>	600 Mbps	600 Mbps	600 Mbps	600 Mbps	600 Mbps
NGFW Throughput <sup>4</sup>	330 Mbps	330 Mbps	330 Mbps	330 Mbps	330 Mbps
Threat Protection Throughput <sup>5</sup>	310 Mbps	310 Mbps	310 Mbps	310 Mbps	310 Mbps
CAPWAP Throughput <sup>6</sup>	1.8 Gbps	1.8 Gbps	1.8 Gbps	1.8 Gbps	1.8 Gbps
Virtual Domains (Default / Maximum)	10 / 10	10 / 10	10 / 10	10 / 10	10 / 10
Maximum Number of FortiAPs (Total / Tunnel Mode)	128 / 64	128 / 64	128 / 64	128 / 64	128 / 64
Maximum Number of FortiTokens	1,000	1,000	1,000	1,000	1,000
Maximum Number of Registered FortiClients	600	600	600	600	600
High Availability Configurations	Active / Active, Active / Passive, Clustering				
<b>Dimensions</b>					
Height x Width x Length (inches)	1.75 x 17.01 x 11.73	1.75 x 17.01 x 13.14	1.75 x 17.01 x 11.73	1.75 x 17.01 x 13.14	3.5 x 17.2 x 11.8
Height x Width x Length (mm)	44 x 432 x 298	44 x 432 x 334	44 x 432 x 298	44 x 432 x 334	89 x 437 x 300
Weight	10.5 lbs (4.8 kg)	12.6 lbs (5.7 kg)	10.5 lbs (4.8 kg)	13.2 lbs (6.0 kg)	17.0 lbs (7.6 kg)
Form Factor	Rack Mount, 1 RU	Rack Mount, 1 RU	Rack Mount, 1 RU	Rack Mount, 1 RU	Rack Mount, 2 RU
<b>Environment</b>					
Power	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Maximum Current	110 V / 3 A, 220 V / 1.5 A	110 V / 7 A, 220 V / 3.5 A	110 V / 3 A, 220 V / 1.5 A	110 V / 7 A, 220 V / 3.5 A	110 V / 7 A, 220 V / 3.5 A
Total Available PoE Power Budget*	–	270 W	–	270 W	270 W
Power Consumption (Average / Maximum)	49 / 83 W	122 / 205 W	66 / 99 W	211 / 375 W	228 / 418 W
Heat Dissipation	283 BTU / h	700 BTU / h	338 BTU / h	1280 BTU / h	1426 BTU/h
Operating Temperature	32–104°F (0–40°C)	32–104°F (0–40°C)	32–104°F (0–40°C)	32–104°F (0–40°C)	32–104°F (0–40°C)
Storage Temperature	-31–158°F (-35–70°C)	-31–158°F (-35–70°C)	-31–158°F (-35–70°C)	-31–158°F (-35–70°C)	-31–158°F (-35–70°C)
Humidity	20–90% non-condensing	20–90% non-condensing	20–90% non-condensing	20–90% non-condensing	20–90% non-condensing
Operating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)
<b>Compliance</b>					
FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB					
<b>Certifications</b>					
ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN; USGv6/IPv6					

Note: All performance values are "up to" and vary depending on system configuration. IPsec VPN performance is based on 512 byte UDP packets using AES-256-SHA1. 1. IPS performance is measured using 1 Mbyte HTTP and Enterprise Traffic Mix. 2. SSL Inspection is measured with IPS enabled and HTTP traffic, using TLS v1.2 with AES256-SHA. 3. Application Control performance is measured with 64 Kbytes HTTP traffic. 4. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix. 5. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix. 6. CAPWAP performance is based on 1444 byte UDP packets.

For complete, up-to-date and detailed feature set, please refer to the Administration Handbook and FortiOS Datasheet.

\* Maximum loading on each PoE port is 15.4 W (802.3af).

## ORDER INFORMATION

Product	SKU	Description
FortiGate 200D	FG-200D	18x GE RJ45 (including 16x LAN ports, 2x WAN ports), 2x GE SFP DMZ ports, FortiASIC NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.
FortiGate 200D-POE	FG-200D-POE	18x GE RJ45 (including 8x LAN and 2x WAN, 8x POE), 2x SFP, FortiASIC NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.
FortiGate 240D	FG-240D	42x GE RJ45 ports (including 40x LAN ports, 2x WAN ports), 2x GE SFP DMZ ports, FortiASIC NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.
FortiGate 240D-POE	FG-240D-POE	42x GE RJ45 ports (including 16x LAN ports, 2x WAN ports, 24x POE ports), 2x GE SFP slots, FortiASIC NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.
FortiGate 280D-POE	FG-280D-POE	86x GE RJ45 ports (including 52x LAN ports, 2x WAN ports, 32x PoE ports), 4x GE SFP DMZ ports, FortiASIC NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.
Optional Accessories		
External redundant AC power supply	FRPS-100	External redundant AC power supply for up to 4 units: FG-300C, FG-310B, FS-348B and FS-448B. Up to 2 units: FG-200B, FG-200D, FG-240D and FG-300D, FG-400D, FG-500D, FG-600D, FHV-500D, FDD-200B, FDD-400B, FDD-600B and FDD-800B.
Redundant AC power supply	FRPS-740-FG	Redundant AC power supply for up to 2 units: FG-240D-POE and FG-280D-POE.



GLOBAL HEADQUARTERS  
Fortinet Inc.  
899 Kifer Road  
Sunnyvale, CA 94086  
United States  
Tel: +1.408.235.7700  
www.fortinet.com/sales

EMEA SALES OFFICE  
905 rue Albert Einstein  
Valbonne 06560  
Alpes-Maritimes, France  
Tel: +33.4.8987.0500

APAC SALES OFFICE  
300 Beach Road 20-01  
The Concourse  
Singapore 199555  
Tel: +65.6395.2788

LATIN AMERICA SALES OFFICE  
Sawgrass Lakes Center  
13450 W. Sunrise Blvd., Suite 430  
Sunrise, FL 33323  
United States  
Tel: +1.954.368.9990